



d16 group
AUDIO SOFTWARE

REDOPTOR2

VINTAGE TUBE DISTORTION



User Manual

Requirements

Software and hardware requirements:

Windows PC

OS version	Windows 7, Windows 8, Windows 10
CPU	2.0 GHz with SSE (2.4 GHz multicore system recommended)
RAM	4 GB (8 GB recommended)
Software	VST / AAX compatible host application (32bit or 64bit)

Mac OS X

OS version	OS X 10.7 or newer
CPU	Intel based 2.0 GHz (2.4 GHz recommended)
RAM	4 GB (8 GB recommended)
Software	AU / VST / AAX compatible host application (32bit or 64bit)

Overview


Redoptor 2 is a tube-emulating distortion effect.



The Redoptor 2 graphical user interface

The plugin interface comprises two main sections:

- **Configuration and preset management** (the top-most section)

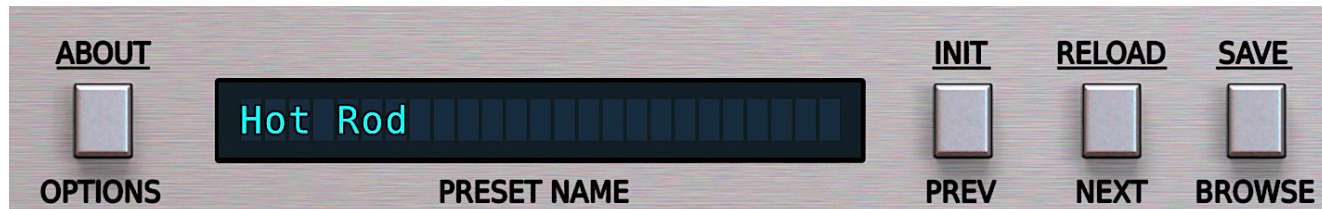

Configuration and preset management section

- **Signal processing** (all other controls)

Signal flow

In this chapter, we'll describe the signal path through **Redoptor 2** and explain component and its controls along the way.

Basic modules

Despite its fairly complex appearance, internally **Redoptor 2** consists of just a few signal processing components, each housed within its own section in the graphical user interface.

Preliminary filter


At the very start of the signal path, optional **Low Cut** and **High Cut** filters enable broad-strokes shaping of the frequency spectrum before the signal reaches the **Preamp**.



The preliminary filters

The **Low** and **High Cut** filters are operated using the following controls:

- **Low cut** – The knob adjusts the **high-pass** filter cutoff frequency (range: $[0\text{Hz} - 300\text{Hz}]$), and the button below activates/deactivates the filter.
- **High cut** – The knob adjusts the **low-pass** filter cutoff frequency (range: $[1.5\text{kHz} - 8\text{kHz}]$), and the button below activates/deactivates the filter.

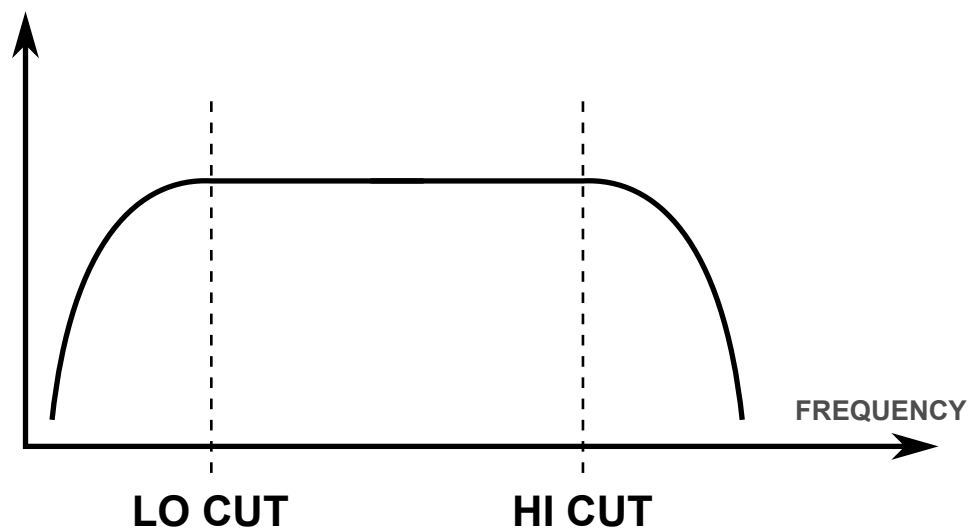

The combined frequency response curve of the Low and High Cut filters.

Preamp

The **Preamp** compresses and amplifies (in that order) the input signal before it arrives at the **Tube Clipper** section.



The *Preamp* section

The **Preamp** has two control:

- **Dynamics** – Turn clockwise to increase the amount of compression the input signal prior to amplification.
- **Gain** – Sets the amount of amplification applied by the preamp in decibels, from *0dB* to *+ 100dB*.

Tube drive


The **Tube Drive** section controls the **Tube Clipper** and its associated filters.



The Tube Ddrive section

There are four controls in this section:

- **Bias** – Controls the amplitude of the odd harmonics appearing in distorted signal. The further clockwise the knob is turned, the more harmonics in the signal.
- **Tone** – The output of the **Tube Clipper** feeds into a dual passive filter, combining; *low-pass* and *high-pass* types. The **Tone** parameter cross-fades between them.

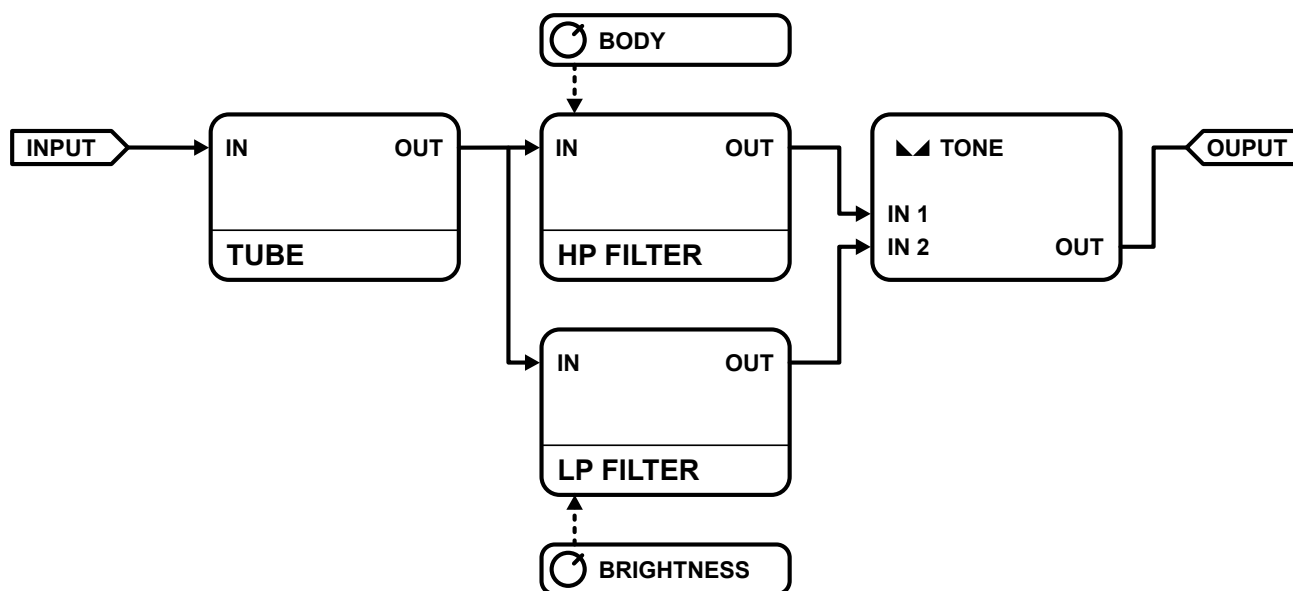

The signal flow through the Tube Drive section

- **Brightness** – Adjusts the post-clipping passive *low-pass* filter cutoff frequency.
- **Body** – Adjusts the post-clipping passive *high-pass* filter cutoff frequency.

Parametric equalizer

The **Parametric Equalizer** section presents each of its four adjustable frequency bands as a column of three controls. From left to right:

- **Low** – Boost or cut a frequency range peaking at [20Hz-1kHz].
- **Mid-low** – Boost or cut a frequency range peaking at [100Hz-5kHz].
- **Mid-high** – Boost or cut a frequency range peaking at [1-10kHz].
- **High** – Boost or cut a frequency range peaking at [5-16kHz].



Parametric EQ section

Each band offers the following parameters:

- **Frequency** – Sweep the center frequency of the band's peak filter.
- **Gain** – Boost or attenuate for the amplitude of the band by up to +/- 24 dB
- **Band width** – Broaden or narrow the frequency range of the band from 4 to 0.5 octaves.

Master section

At the final stage of the signal path, the **FX** knob controls the wet/dry signal mix and the **Output volume** knob lowers or raises the final amplification level.




Master section

For keeping excessive output level peaks under control, the optionally enabled **Limiter** features automatic gain make-up and adjustable **Threshold**.

Path of the signal's flow

Here's a diagram showing the signal path through Redoptor 2:

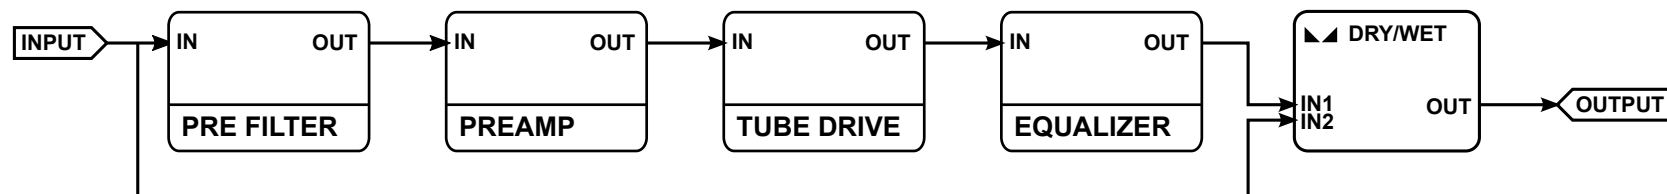

The signal flow from input to output


Preset Management

Preset Storage

Presets – both those in the **Factory** library and those made by the **User** – are stored as files in specific folders on your hard drive. Every time the plugin is loaded, these folders are scanned and the presets they contain are consolidated in a linear structure in the **Preset Browser**.

Browsing Presets

The **Presets configuration and management** section enables easy navigation and browsing of the preset library.

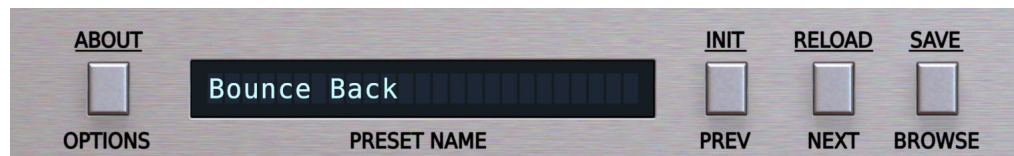


Presets Configuration and Management Section

- **PRESET NAME** – Displays the name of the currently loaded preset.
- **PREV / NEXT** – Step backwards and forwards through the preset list (depending on the currently set filters – see below).
- **INIT** – Win (+ **PREV**), Mac (+ **PREV**) – Restore all plugin parameters to their initial settings.
- **RELOAD** – Win (+ **NEXT**), Mac (+ **NEXT**) – Reload the current preset.

- **SAVE** – Win ( + **BROWSE**), Mac ( + **BROWSE**) – Save the current parameters as a new preset or overwrite the existing one (see below).
- **BROWSE** – Fold the **Preset Browser** panel out from the bottom of GUI.

The **Preset Browser** looks like this:

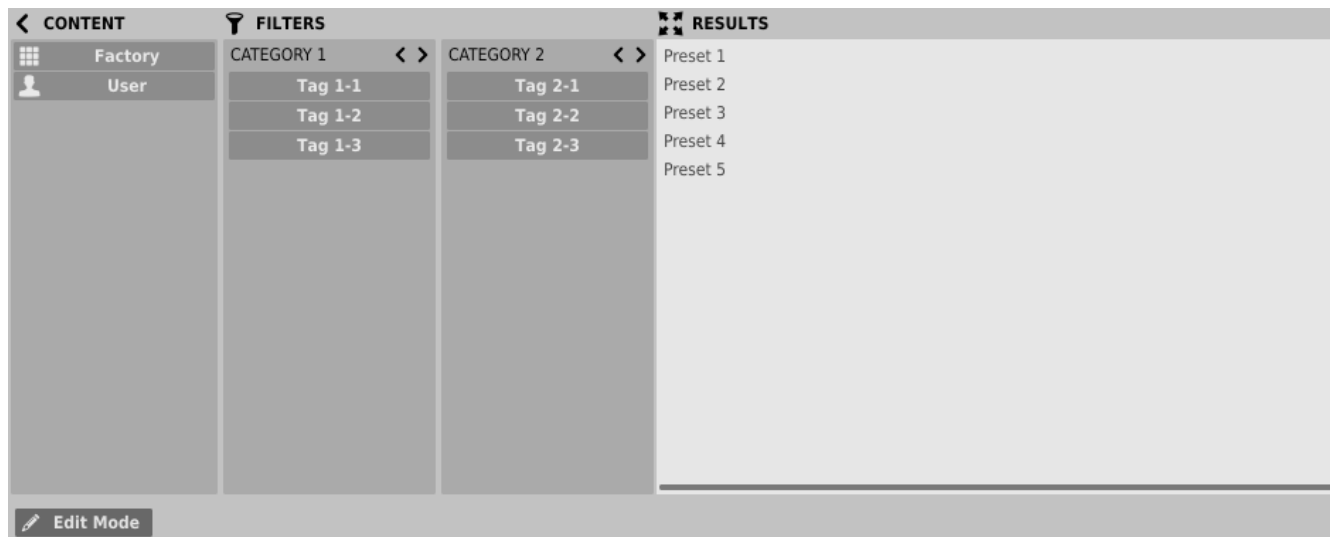

Preset Browser

One can see three main sections:

- **Content** – The available preset resources.
- **Filters** – View only certain categories or types of presets (inactive by default).
- **Results** – The list of presets that meet the criteria set by the **Filters**.

Content


Select preset resources for browsing. There are two resources available:

- **Factory** – The presets that are included with the plugin. **Factory** presets are read-only (ie, they can't be overwritten).
- **User** – Presets created by the user. **User** presets can be freely modified, backed up as files, shared with others, etc.

Selecting a single **Content** resource narrows the filtered preset list down to presets from that resource only.

Preset Filters


The browser enables classification of presets through the use of **Categories** and **Tags**, in order to facilitate filtering of the **Results** list.

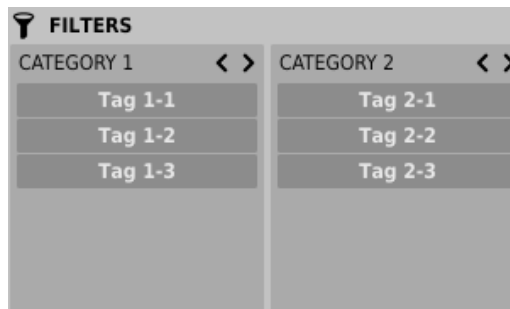

Preset Browser Category Filters

Categories and Tags

Each preset is assigned to one or more of a few common **Categories**. Within each **Category** there may be one or more **Tags**.

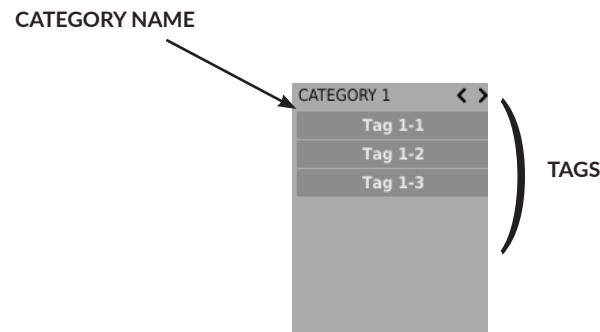


A single Category in a Filter with three Tags

The **Factory** presets come with **Categories** and **Tags** already assigned. These have been chosen to specifically describe the sounds and characteristics of those presets as representatively as possible, taking into account the remit of the plugin.

The **Categories** and **Tags** assigned to the **Factory** presets can't be edited. **User** presets, however, can be given **Categories** and **Tags** from the factory content, and you can also define your own custom **Tags**.

Results

The list of presets from the selected **Content** resources that meet the filtering criteria is displayed in the **Results** section. This is where the actual browsing and loading of presets is done (in the default **Browsing Mode**).

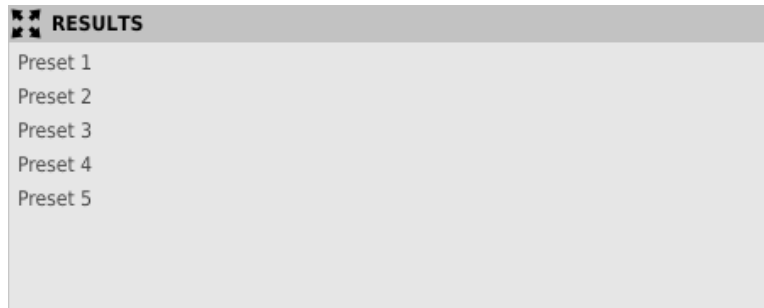


The Results section in the Preset Browser

Click the name of a preset to select and load it.

Double-click a preset to enter preset name edit mode. ▣


Presets Filtering

The columns in the **Filters** section represent particular **Category filters**, while the rows in each of these columns represent the **Tags** available within each **Category**.

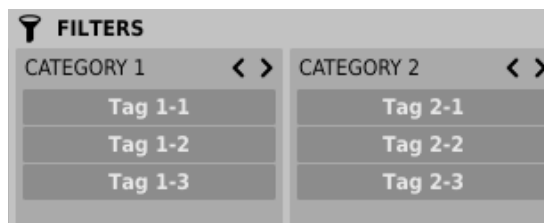

Preset Browser Category Filters

The **Filters** cascade through the columns, from left to right: all presets in the selected Content resources are filtered according to the **Tags** in the first **Category** (the first column from the left), the remaining presets are then filtered by the **Category** represented by the second column, etc, up to the last active **Category Filter**.

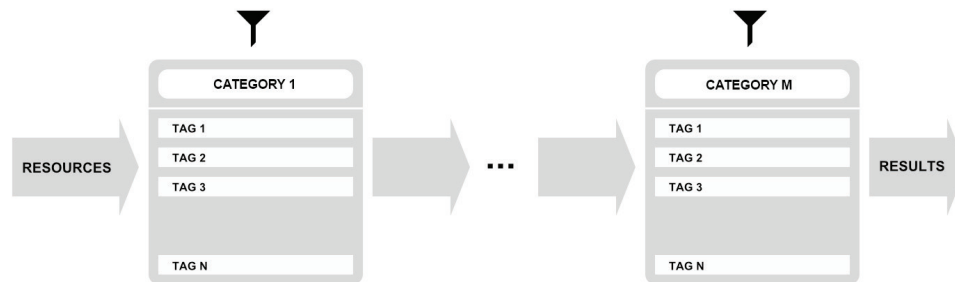


Preset Filtering with Category Tags

The result of this cascaded filtering process – ie, only the presets that meet the criteria of every active filter – is listed below, in the **Results** section.

Basic Actions on Filters

The **Tag** buttons in a **Filter** toggle between active and inactive when clicked: a grey **Tag** is inactive, and a teal blue **Tag** is active. A **Filter** is only active when at least one **Tag** in a column (**Category**) is active.

For example, if the first column in the illustration below represents the *Category 1 Category*, containing the *Tag 1-1*, *Tag 1-2* and *Tag 1-3* **Tags**, clicking the *Tag 1-1* Tag will activate the **Category Filter** *Category 1*, and narrow the preset list down to only the presets assigned the *Tag 1-1* **Tag** in the *Category 1 Category*.

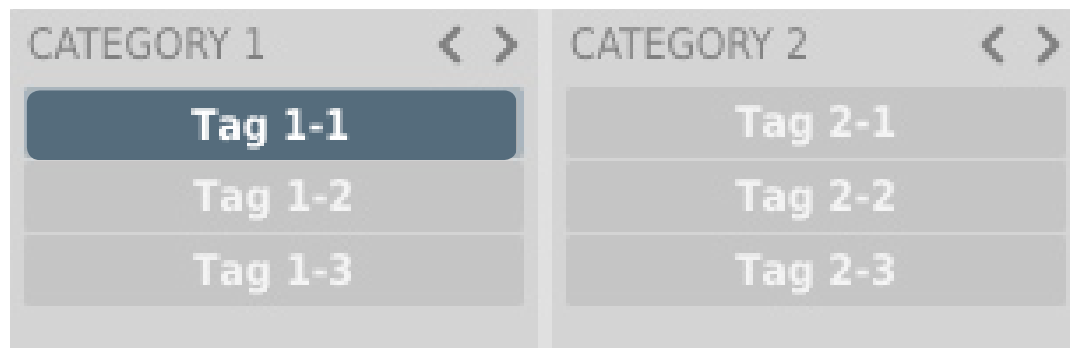

Enabling the 'Tag 1-1' Tag in the 'Category 1' Category

Clicking the *Tag 1-1 Tag* again deactivates the **Filter**, so that all presets from the selected **Content** resources are displayed again.


Reordering Categories

To the right of the **Category Filter** header are two arrow buttons:



Filter reordering

These move the **Category** left or right in the cascade. Clicking the right arrow swaps the current **Category** with the **Category** to the right; clicking the left arrow swaps the current **Category** with the **Category** to the left.

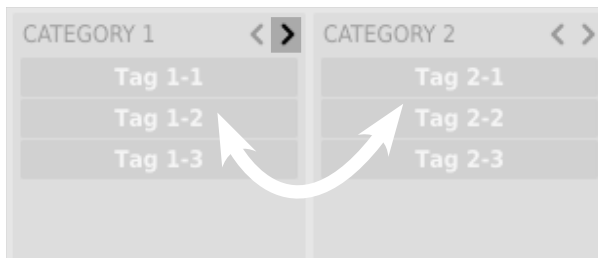


Presets Filtering with the Use of Categories Tags

Clicking the left arrow for the left-most **Category**, or the right arrow for the right-most category, does nothing, as the column has no predecessor/successor with which to swap.

Presets editing – Edit Mode

Activating **Edit Mode** in the **Preset Browser** enables the editing of preset names, **Categories** and **Tags**, as well as the deletion, export and import of presets. Note that these operations are only permitted for **User** presets, not **Factory** presets.

Enter and exit **Edit Mode** using the button in the bottom left-hand corner



The Edit Mode button

In **Edit** mode, the **Preset Browser** changes in appearance and function:



The Preset Browser in Edit Mode

1. The **Filters** section changes becomes the **Edit Tags** section, which looks almost identical but is used to change – rather than operate – the **Categories** and **Tags** of the selected presets.
2. Presets (**User** only – not **Factory**) are selected for editing in the **Results** section.
3. The **Delete**, **Export** and **Import** buttons at the bottom of the interface are used to delete or export selected **User** presets, and import a set of presets to the **User Content** resource.
4. The resource selection in the **Content** section can't be changed, as editing is only possible for user presets.

Selection of presets for editing

You can edit presets one at a time or in groups. Select one or more presets in the **Results** section using the following procedure:

- **Click a preset** – Choose the preset from the list,
- **Win** (**ctrl**) + **Click a preset**), **Mac** (**cmd**) + **Click the preset**)– Add another preset to the selection.
- **Shift** + **Click a preset** – Select a contiguous series of presets from the last one selected to the one clicked.

Editing Tags

Changing the Tags assigned to the selected preset(s)

With one or more presets selected, click a **Tag** button to assign it, or unassign it if already assigned.




Filters' tags

Selecting multiple presets with **Tags** assigned enables those **Tags** to be edited. If a particular **Tag** is assigned to *all* selected presets, it's marked with an intense teal blue color.

When a particular **Tag** is only assigned to *some* of the selected presets, it's given a pale teal blue colour.

All **Tags** that don't appear in *any* of the selected presets are coloured grey.

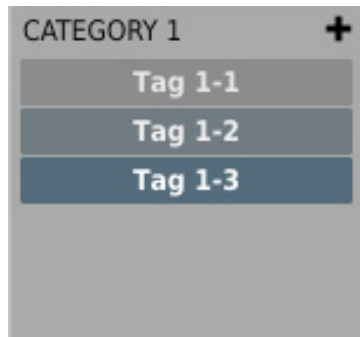

Colouring of Tags by status for selected presets

Changing the **Tag** status for one selected preset changes it to the same status for *all* selected presets. The change of status is indicated by an asterisk (*) to the left of the **Tag** buttons.



Notification of changes to the Tag status of selected Presets

User edits don't have to be confirmed. They're indicated by asterisks next to the edited **Tag**.

Preset name editing

Double-click the name of a preset to enter name editing mode.

Deleting presets

Selecting one or more presets invokes the **Delete** button at the bottom left corner. Click this to delete the selected presets.

Preset export and import

Use the **Export** and **Import** buttons at the bottom of the **Preset Browser** to export the presets selected in the **Results** section as a package, or import a previously exported  package into the Preset library.

Saving the current settings as a preset

To save the current plugin parameter settings as a **User** preset click **BROWSE** in the **Configuration and Presets Browsing** section while holding -Win (**Ctrl**) + **BROWSE**), Mac (**Cmd** + **BROWSE**) in **Configuration** and **Presets Browsing** section. The **Preset Browser** will automatically open in **Edit Mode**.



Saving the settings as a preset


Enter a name for your newly created preset in the text field at the bottom, then confirm it by clicking **Save**, or back out of the process by clicking **Cancel**.

As the **Preset Browser** automatically enters **Edit Mode**, you can immediately categorize the preset using the **Edit tags** functions before saving it.

Configuration

Parameter settings

Right-click any plugin parameter to open its contextual menu.



Closed contextual menu

Using this, you can:


- Check the name and current value of a parameter,
- See whether or not the parameter has been assigned a MIDI CC number, and if so, which one,
- Link the parameter to a MIDI CC number.

Clicking the arrow strip at the bottom of the menu expands it to display all available options. Right-clicking the parameter again or left-clicking outside the menu area closes the contextual menu.

MIDI Learn

The **MIDI Learn** function enables quick assignment of physical MIDI controllers to plugin parameters. An assignment is made by following this procedure:

1. Right-click the parameter you want to assign to your hardware MIDI controller. The contextual menu opens.
2. Click the arrow strip at the bottom to expand the contextual menu.



Expanded contextual menu

3. Click the **Learn** button to put the plugin into a pending state, awaiting MIDI CC input from your hardware MIDI controller
4. Move the relevant knob or slider on your MIDI controller to make the assignment
5. Click **OK** to save the change or **Cancel** to restore the previous setting

MIDI Unlink

To delete the MIDI CC assignment for a plugin parameter:

6. Open the contextual menu by right-clicking the parameter in question
7. Expand the menu by clicking the arrow strip at the bottom
8. Click the **Clear** button
9. Confirm with **OK** button

Current settings

The **Current settings** are applied separately to each instance of the plugin but initialized with the **Default settings** when the plugin is loaded (see next chapter).

The **Current settings** are adjusted in the status bar at the bottom of the interface.




The Current settings in the status bar

From left to right, they comprise:

- The **Current processing path quality** for **Offline** and **Real-time** modes
- Saving/Loading of the **MIDI CC Map**
- A choice of two **GUI** sizes

Processing Path Quality

Set the **Current quality** of the plugin's generated output for **Real-time** and **Offline** modes.




Choosing the plug-in interface size

There are two quality levels available for each mode: **Normal** and **High**.

MIDI CC Map

Save all current MIDI CC parameter assignments as a MIDI Map file, or load an existing MIDI Map file into the plugin.



Saving/loading the MIDI CC Map

GUI size

Switch the graphical user interface between two sizes: Small and Big.




Choosing the plug-in interface size

Default settings

Change the **Default settings** of the plugin in the **Options** panel. The **Current settings** of every new instance of the plugin are initialized to the **Default settings**.


The **Default settings** are stored in a configuration file. This file is updated every time an instance of the plugin is unloaded from the host application.

Open the **Options** panel by clicking the **Options** button:



Options button

The **Options** panel is made up of four sections, only one of which can be expanded at a time.

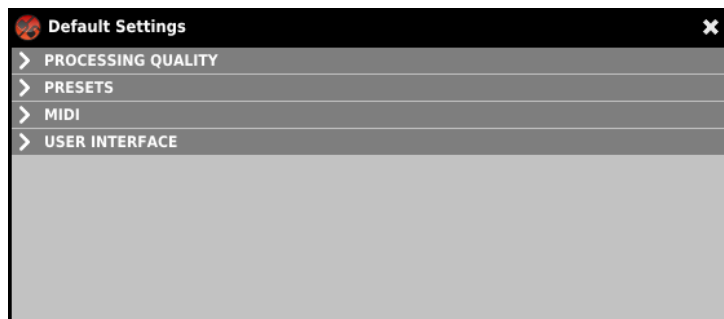


Options Panel

The four sections are:

- **Processing Quality** - The default Processing Path quality
- **Preset**s - The preset loading warning dialog status
- **MIDI** - The default MIDI CC Map
- **User Interface** - The default GUI size

Processing Quality



Processing Quality Choice Section

In this section, you can configure the default quality of the processing path for the **Real-time** mode and **Offline** modes.

MIDI



Default MIDI Map Choice Section

Set the path to a default **MIDI Map** file. Clicking the **MIDI CC** Map checkbox 'unlocks' the **Browse** button and activates the selected MIDI Map.


User Interface



Processing Quality Choice Section

Choose one of two default GUI sizes to best match the plugin to the resolution of your computer monitor.

Presets



Displaying confirmation dialog option

With the box checked, clicking the **Prev** or **Next** preset button after the parameters of the current preset (or previously initialized state) have been changed pops up a confirmation dialog to prevent accidental loss of those changes.

CONTENTS

Requirements.....	2
Overview	3
Signal flow	5
Basic modules.....	5
Preliminary filter.....	5
Preamp	7
Tube drive	8
Parametric equalizer	10
Master section	11
Path of the signal's flow	12
Preset Management.....	13
Preset Storage	13
Browsing Presets	13
Content	15
Preset Filters	15
Categories and Tags.....	16
Results	16
Presets Filtering.....	17
Basic Actions on Filters	18
Reordering Categories	19
Presets editing – Edit Mode.....	19
Selection of presets for editing.....	20
Editing Tags	21
Changing the Tags assigned to the selected preset(s)	21

Preset name editing.....	23
Deleting presets	23
Preset export and import	23
Saving the current settings as a preset.....	24
Configuration	25
Parameter settings.....	25
MIDI Learn.....	26
MIDI Unlink.....	27
Current settings.....	27
Processing Path Quality.....	28
MIDI CC Map	28
GUI size	29
Default settings	29
Processing Quality	30
MIDI	31
User Interface	31
Presets.....	32